(72) Inventors:
• Saito, Masafumi
Tokyo (JP)
• Ikeda, Tetsuomi
Machida-shi, Tokyo (JP)

(74) Representative: Lewald, Dietrich, Dipl.-Ing. et al
Lewald . Grape . Schwarzensteiner
Patentanwälte
Rindermarkt 6
80331 München (DE)

(54) MCM system, with a plurality of data streams, each with its own transmission parameters

(57) Data sequences (D1 through DL) correspond to L different parameter sets (effective symbol length, guard interval length, the number of carrier waves) and transformed into parallel data by respective serial/parallel converters (111 through 11L), which are allocated to respective carrier waves for OFDM and subjected to inverse discrete Fourier transform by inverse discrete Fourier transformers (121 through 12L) to produce sampled values for the transmission waveform in the time domain. The sampled values are transformed into serial sequences of sampled values by parallel/serial converters (131 through 13L) and then into a single temporal sampling sequence by a temporal sampling sequence switching unit (14). A frame synchronizing symbol is added to the temporal sampling sequence and then transformed into an analog base band OFDM signal before it is converted up to a transmission signal. The frequency bandwidth of the OFDM signal is made smaller than a predetermined value defined by the bandwidth of the available transmission channel. As a result, an OFDM signal that can be received well regardless of the mode of reception can be transmitted.
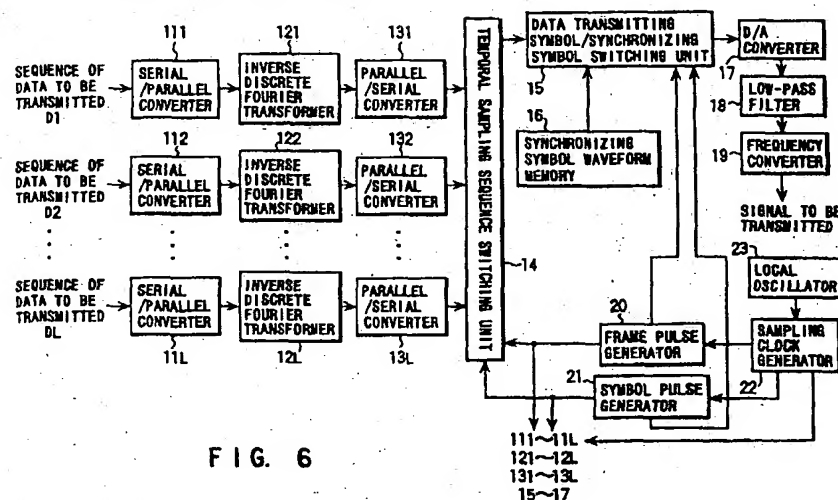
FIG. 6

EP 0 762 701 A2

Description

This invention generally relates to a transmission system for digital broadcasting and, more particularly, it relates to a data transmission system using orthogonal frequency division multiplexing (hereinafter referred to as OFDM) and dig-
5 ital modulation/demodulation. The present invention also relates to a transmitter and a receiver adapted to such a system.

The demand for digitized television broadcasting using ground waves has been increasing to improve the quality of television service. The OFDM transmission system appears to be particularly promising for ground wave digital signal transmission because it is robust against the multipath effect (or the ghost effect for television).

10 The OFDM transmission system is a variation of the multiple carrier modulation system, with which a transmission signal is produced by combining a large number (tens to thousands) of digitally modulated waves (carrier waves 1 through k) as typically illustrated in FIG. 1. Each of the carrier waves may be modulated in a mode selected from a number of different possible modes including QPSK, 16QAM and 64QAM.

The data transmission using the OFDM transmission system is realized by using transmission symbols as illus-
15 trated in FIG. 1, each of which constitutes a unit. Each transmission symbol comprises an effective symbol period and a guard interval. The effective symbol period is a signal period essential to data transmission. The guard interval is a redundant signal period designed to reduce the multipath effect by cyclically repeating the signal waveform of the effective symbol period.

If the gap between any two adjacent frequencies is made equal to the reciprocal number of the effective symbol
20 period for OFDM transmission, the nil point of the frequency spectrum of each digitally modulated wave coincides with the center frequency of the adjacent modulated waves as shown in FIG. 2A so that no cross interference occurs between them. As seen from FIG. 2B, the spectrum of an OFDM signal shows a substantially rectangular profile as a whole. If the effective symbol period is ts and the number of carrier waves is K, then the frequency gap between any adjacent carrier waves is equal to 1/ts while the transmission bandwidth is equal to K/ts.

25 With the OFDM transmission system, a transmission frame is comprised of tens to hundreds of transmission symbols as shown in FIG. 1. FIG. 3 illustrates a typical OFDM transmission frame. The OFDM transmission frame contains frame synchronizing symbols, if necessary, along with data transmitting symbols. If necessary, it may additionally contain service identifying symbols.

FIG. 4 illustrates the concept of a transmitter A and a receiver B adapted to the OFDM transmission system.

30 The transmitter A divides a binary data to be transmitted into data blocks, each of which has a predetermined number of bits and is converted into a complex number prior to transmission. Serial/parallel converter A1 allocates different complex numbers C_i ($i = 1$ to N) to the carrier wave frequencies on a one by one basis and inverse discrete Fourier transform circuit A2 carries out an operation of inverse discrete Fourier transform to the time domain. As a result, sampled data are produced for a time base waveform so that a base band analog signal having a temporally continuous
35 waveform is obtained from the sampled data and processed for frequency conversion by frequency converter A3 before it is transmitted.

The number of sampled values produced on a time base by inverse discrete Fourier transform is typically 2^n for each effective symbol period (n being a positive integer). Thus, if r_G is defined as $r_G =$ (guard interval length)/(effective symbol length), then $2^n \cdot (1 + r_G)$ samples are produced for each transmission symbol. The
40 length of each transmission symbol is usually equal to the time interval of sampling points multiplied by an integer.

On the part of the receiver B, frequency converter B1 processes the received signal for frequency conversion to obtain a base band signal waveform, which is sampled at a sampling rate same as that of the transmitter. Discrete Fourier transform circuit B2 processes the sampled data to carry out an operation of discrete Fourier transform to the frequency domain and obtains by calculation the phase and the amplitude of each of the carrier wave frequency
45 components to determine the value of each of the received data before they are converted into serial data by parallel/serial converter B3 and produced as data output.

While television signals are received either in the fixed mode or in the mobile mode (including the portable reception mode), a good reception is essential regardless of the mode of reception. With any known OFDM system, the effective symbol length, the guard interval length and the number of carrier waves of data transmitting symbols are
50 determined mainly on the basis of either the fixed reception mode or the mobile reception mode. If the effective symbol length, the guard interval length and the number of carrier waves of data transmitting symbols are based mainly on, for example, the fixed reception mode, not the mobile reception mode, the influence of fading will be serious.

As pointed out above, with any known OFDM transmission system, the effective symbol length, the guard interval length and the number of carrier waves of data transmitting symbols are determined on the basis of the most popular
55 reception mode because they cannot be selected so as to adapt themselves to more than one different modes.

It is, therefore, the object of the present invention to provide an OFDM transmission system that ensures a good signal reception regardless of the selected reception mode and a transmitter and a receiver adapted to such a system.

According to the invention, the above object is achieved by providing an OFDM transmission system for transmitting data by means of OFDM and digital modulation/demodulation, characterized in that, if the tim interval of OFDM sam-

pling points is T, the effective symbol length N_iT (N_i being a positive integer), the guard interval length M_iT (M_i being zero or a positive integer) and the number of carrier waves K_i (K_i being a positive integer) of the i-th data transmission symbol in an OFDM transmission frame can take a plurality of respectively different values that can be arbitrarily selected, provided that K_i/N_iT is kept smaller than a constant value W (W being a positive real number) determined by the bandwidth of the transmission channel.

In other words, with the OFDM transmission system according to the invention, two or more than two values are used for the effective symbol length and also for the guard interval length of a data transmission symbol and the symbol length is made equal to the sampling period, which is a basic unit for OFDM digital signal processing, multiplied by an integer. Additionally, the frequency bandwidth of OFDM transmission signal is made smaller than a constant value determined by the bandwidth of the transmission channel.

As a result, no cross interference appears if a plurality of data transmitting symbols having respective effective symbol lengths and guard interval lengths that are different from each other are multiplexed in a single transmission channel. Thus, the OFDM transmission system according to the invention can meet different conditions for data transmission in a single transmission channel without reducing the efficiency of the use of frequencies and entailing any cross interference among carrier waves.

This invention can be more fully understood from the following detailed description when taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a graph schematically showing signal transmission waveforms and a transmission symbol used for th OFDM transmission system;

FIGS. 2A and 2B are graphs schematically showing the frequency spectrum of the OFDM transmission system;

FIG. 3 is a graph schematically illustrating the configuration of a transmission frame of the OFDM transmission system;

FIG. 4 is a schematic block circuit diagram of a transmitter and a receiver adapted to a known OFDM transmission system;

FIG. 5 is a graph showing the frequency spectrum of an OFDM transmission system having a frequency block for the fixed reception mode and a frequency block for the mobile reception mode in a transmission channel;

FIG. 6 is a schematic block circuit diagram of an embodiment of a transmitter adapted to the OFDM transmission system of the invention;

FIG. 7 is a schematic block circuit diagram of an embodiment of a receiver adapted to the OFDM transmission system of the invention;

FIG. 8 is a graph schematically illustrating the configuration of a transmission frame of the OFDM transmission system according to the invention;

FIG. 9 is a graph schematically illustrating the relationship between the effective symbol length of an OFDM transmission symbol and the average transmission power level that can be used for another embodiment of the invention;

FIGS. 10A and 10B respectively show schematic block diagrams of an embodiment of a transmitter and that of a receiver according to the invention and designed to change the carrier wave frequencies at predetermined periods and a predetermined frequency gap;

FIGS. 11A and 11B show two alternative arrangements of carrier waves for shifting the frequency of each of the carrier waves within a base band in order to change the frequency at predetermined periods, of which FIG. 11A is designed for symbols for mobile reception whereas FIG. 11B is designed for symbols for fixed reception; and

FIG. 12 is a schematic view of a transmission frame comprising one or more data transmitting symbols for mobile and fixed receivers, where symbols for mobile reception are arranged at predetermined time periods.

The idea underlying the present invention will firstly be described. OFDM transmission symbols adapted to fixed reception and those adapted to mobile reception may be transmitted through a single transmission channel by dividing each OFDM signal into two frequency blocks on a frequency base, which frequency blocks are separated by a guard band in order to prevent interference from taking place among carrier waves, and selecting different values for the symbol length in these frequency blocks, which are respectively used for the fixed and mobile reception modes as shown in FIG. 5.

However, with the above method of dividing an OFDM signal into a plurality of blocks, the carrier waves which belong to different frequency blocks can not have an orthogonal relationship because the effective symbol length and the carrier wave frequency gap are differentiated from a frequency block to another, therefore, a guard band has to be provided between any adjacent frequency blocks at the cost of reducing the efficiency of the use of frequencies and the transmission bit rate of a transmission channel.

According to the invention, data transmitting symbols adapted to fixed reception and those adapted to mobile reception can be transmitted through a single transmission channel without providing one or more than one guard bands to prevent cross interference from occurring among carrier waves and hence without reducing the efficiency of

the use of frequencies.

With OFDM transmission systems, an FFT window having the same length as that of the effective symbol period is provided in each data transmitting symbol period and 2^n sampling points are subjected to an operation of discrete Fourier transform to the frequency domain in the demodulator.

The FFT window is arranged usually at the rear end of each transmission symbol. Note that no ghost can get into the FFT window in the demodulator from the adjacent symbol if the multipath delay time (or the ghost signal delay time for television) is shorter than the guard interval length. Therefore, the degradation due to the multipath phenomenon can be made far less serious than the degradation in a single carrier arrangement. Thus, with OFDM transmission systems, the influence of a ghost having a long delay time can be prevented by selecting a long guard interval to make the system substantially unaffected by the multipath phenomenon.

Now, an OFDM symbol length and a guard interval length adapted to fixed reception and those adapted to mobile reception will be discussed below.

Generally, the influence of multipath is one of the most important technological problems that have to be dealt with to achieve a good fixed reception for the OFDM system. As pointed out above, the use of a long guard interval is a useful technique for the prevention of the influence of ghost signals.

However, since the guard interval adversely affects the transmission capacity (bit rate) of a symbol in a manner as described above and the use of a long guard interval reduces the bit rate of a symbol having a given length, the effective symbol length has to be made proportional to the guard interval length and, therefore, a symbol having a long length has to be used to maintain a desired level of bit rate.

For the mobile reception mode, on the other hand, the characteristics of the transmission channel can change with time due to the fading phenomenon and, therefore, the use of a long OFDM symbol can result in an unnegligible change in the characteristics of the transmission channel within the time required for the transmission of a single symbol and hence a large bit error rate appears if the OFDM symbol length is too long. In other words, a long guard interval and hence a long symbol length operate disadvantageously for the fading phenomenon that can be observed in mobile reception. It may be safe to say that the portable reception mode is a combination of the fixed and mobile reception modes.

As discussed above, for the OFDM transmission system, the optimal values of the guard interval length, the effective symbol length and other transmission parameters may vary depending on the mode of reception. Therefore, a single set of values probably cannot optimize the reception in both the fixed and mobile reception modes. Thus, the OFDM transmission system according to the invention will be particularly useful when transmitting data through a single transmission channel for both the fixed and mobile reception modes, while using long symbols in the fixed reception mode.

Now, an embodiment of a transmitter and that of a receiver adapted to the OFDM transmission system according to the invention will be described in detail by referring to FIGS. 6 and 7.

FIG. 6 is a schematic block circuit diagram of an embodiment of a transmitter adapted to the OFDM transmission system of the invention. The transmitter comprises serial/parallel converters 111 through 11L, inverse discrete Fourier transformers 121 through 12L, parallel/serial converters 131 through 13L, a temporal sampling sequence switching unit 14, a data transmitting symbol/synchronizing symbol switching unit 15, a synchronizing symbol waveform memory 16, a D/A converter 17, a low-pass filter 18, a frequency converter 19, a frame pulse generator 20, a symbol pulse generator 21, a sampling clock generator 22 and a local oscillator 23.

A total of L sequential data D1 through DL to be transmitted are applied respectively to the L serial/parallel converters 111 through 11L. A set of L parameters (effective symbol length, guard interval length, number of carrier waves) are provided to correspond to the L sequential data D1 through DL to be transmitted.

Said serial/parallel converters 111 through 11L convert respective serial data into parallel data, which are allocated respectively to the carrier waves of the OFDM transmission system. The inverse discrete Fourier transformers 121 through 12L determines the phases and the amplitudes of the respective carrier waves on the basis of the data allocated for transmission. The phase and the amplitude of each of the carrier waves are treated as a complex number in the frequency domain and subjected to an operation of inverse discrete Fourier transform and the sampled values of the transmission waveform obtained in the time domain are produced as outputs. Then, the parallel/serial converters 131 through 13L convert the temporally sampled values produced in parallel into a sequence of serially sampled values for each symbol.

On the other hand, the sampling clock generator 22 generates a sampling clock on the basis of the original oscillation frequency signal produced by the local oscillator 23. The frame pulse generator 20 and the symbol pulse generator 21 respectively generate a frame pulse and a symbol pulse from the sampling clock. The sampling clock, the frame pulse and the symbol pulse are fed to the components of the transmitter for timing purposes.

The temporal sampling sequence switching unit 14 selectively switches the L sequences of temporal samples to transform them into a single sequence of temporal samples by using the frame pulse and the symbol pulse. The synchronizing symbol waveform memory 16 produces the sampled values of the frame synchronizing symbol waveform. The data transmitting symbol/synchronizing symbol switching unit 15 switches the sequence of temporally sampled values of the data transmitting symbol produced by the temporal sampling sequence switching unit 14 and the sequence

of sampled values of the waveform of the frame synchronizing symbol produced by the synchronizing symbol waveform memory 16 to transform them into a sequence of temporally sampled values of the base band OFDM signal.

The D/A converter 17 converts the sequence of temporally sampled values into an analog signal and the low-pass filter 18 eliminates the high frequency components of the analog signal to produce an analog base band OFDM signal. The frequency converter 19 converts the frequency of the base band OFDM signal up to an intermediate frequency or a radio frequency and produces a signal to be transmitted.

FIG. 7 is a schematic block circuit diagram of an embodiment of a receiver adapted to the OFDM transmission system of the invention. It comprises a band-pass filter 31, a frequency converter 32, a synchronizing symbol waveform memory 33, a synchronizing symbol position detector 34, an oscillation frequency control signal generator 35, a local oscillator 36, a sampling clock generator 37, a frame pulse generator 38, a symbol pulse generator 39, an A/D converter 40, serial/parallel converters 411 through 41L, discrete Fourier transformers 421 through 42L and demodulation-parallel/serial converters 431 through 43L.

In the receiver having the configuration described above, the band-pass filter 31 eliminates the out-of-band components and the frequency converter 32 converts the intermediate frequency or the radio frequency of the OFDM signal down to a base band. The A/D converter 40 transforms the base band OFDM signal into a sequence of sampled digital values, which are respectively fed to the serial/parallel converter 411 through 41L and also to the synchronizing symbol position detector 34.

The synchronizing symbol position detector 34 detects the position of the front end of the frame by calculating the correlated values of the sequence of sampled values of the base band OFDM signal and the sequence of sampled values of the synchronizing symbol waveform stored in the synchronizing symbol waveform memory 33. It also determines the position for switching the transmitting symbols and the position of the FFT window.

The oscillation frequency control signal generator 35 generates a signal for controlling the oscillation frequency of the local oscillator 36 on the basis of the frame period detected by the synchronizing symbol position detector 34. A method of controlling the local oscillation frequency by means of a frame period is described in Japanese Patent Application No. 6-138386 "Clock frequency automatic control method and transmitter and receiver using the same".

The sampling clock generator 37 generates a sampling clock on the basis of the original oscillation frequency signal produced by the local oscillator 36. The frame pulse generator 38 and the symbol pulse generator 39 respectively generate a frame pulse and a symbol pulse on the basis of the data on the position of the front end of the frame produced by the synchronizing symbol position detector 34 and the sampling clock. The sampling clock, the frame pulse and the symbol pulse are respectively fed to the related components of the receiver and used to generate various timing signals.

The serial/parallel converter 411 through 41L transform the sequence of sampled base band values into parallel data, which are fed then to the discrete Fourier transformers 421 through 42L. The discrete Fourier transformers 421 through 42L transform the sampled values in the time domain into spectra for the respective carrier wave frequencies. The demodulation-parallel/serial converters 431 through 43L estimate the phases and the amplitudes of the carrier waves from the respective frequency component, determines the values of the received data on the basis of the phases and the amplitudes and transform them into sequences of serial received data D1 through DL, which are then produced by the converters as respective outputs. The L sequences of received data D1 through DL corresponds to the L parameter sets.

In the transmission system having the configuration described above, the inverse discrete Fourier transformer 12i (i being an integer between 1 and L) and the discrete Fourier transformer 42i (i being an integer between 1 and L) arbitrarily select N_i, M_i and K_i provided that K_i/N_iT is kept smaller than a constant value W (W being a positive real number) determined by the bandwidth of the transmission channel, where T is the time interval of sampling clocks, N_iT is the effective symbol length (N_i being a positive integer), M_iT is the guard interval length (M_i being zero or a positive integer) and K_i is the number of carrier waves (K_i being a positive integer).

The temporal sampling sequence switching unit 14 switches the data transmitting symbols in such an order that the data transmitting symbols having an identical effective symbol length and a guard interval length are continuously arranged on the time base and the number of switching points where two adjacent data transmitting symbols having at least mutually different effective symbol lengths or mutually different guard interval lengths are located is minimized.

While there may be a number of different orders according to which symbols corresponding to data sequences D1 through DL are transmitted, data transmitting symbols corresponding to a sequence of data (a set of parameters) are to be most basically transmitted in an continuous order on the time base. Then, the number of switching points where two adjacent data transmitting symbols having respective sets of parameters that are different from each other are located is minimized. FIG. 8 shows a typical arrangement of data transmitting symbols that meets the above requirements.

Assuming L = 2 and that sequence D1 of transmission data is for the fixed reception mode and sequence D2 of transmission data is for the mobile reception mode, a good data reception can be realized in either mode by selecting respective sets of parameters for fixed reception and mobile reception for the inverse discrete Fourier transformers 121 and 122.

Thus, with the OFDM transmission system according to the invention, any cross interference can be prevented from appearing between two adjacent carrier waves without using a guard band so that various different requirements of transmission can be met within a single transmission channel without reducing the efficiency of the use of frequencies. Specifically, OFDM data transmitting symbols good for fixed reception and those adapted to mobile reception can be transmitted through a single transmission channel without reducing the efficiency of the use of frequencies.

While L inverse discrete Fourier transformers 121 through 12L are used for L different parameter sets in the arrangement of FIG. 6, a single inverse discrete Fourier transformer may cover L different symbol lengths if it is adapted to the use of a plurality of FFT points.

While the technique of modulation to be used for the OFDM carrier waves may be selected depending on the phase and the amplitude assigned to each carrier wave in the form of a complex number in the frequency domain, different techniques of modulation may be respectively used for sequences D1 through DL of transmission data, typically including techniques such as DQPSK, 16QAM and 64QAM.

Similarly, while L discrete Fourier transformers 421 through 42L are used for L different parameter sets in the arrangement of FIG. 7, a single discrete Fourier transformer may cover L different symbol lengths if it is adapted to the use of a plurality of FFT points.

Of the L data sequences D1 through DL, the sequence D1, for example, and the corresponding transmission symbols may be used to transmit data on the effective symbol lengths, the guard interval lengths, the number of carrier waves and the modulation techniques selected for the carrier waves for the remaining data sequences D2 through DL from the transmitter to the receiver.

Generally speaking, if the effective symbol length $N_a T$ (N_a being a positive integer), the guard interval length $M_a T$ (M_a being zero or a positive integer) and the number of carrier waves K_a (K_a being a positive integer) of a specific data transmitting symbol in an OFDM transmission frame are known by the receiver along with the modulation techniques selected for the carrier waves of the specific symbol, the parameter sets for the data transmitting symbols can be modified by transmitting at least part of the data on the effective symbol lengths, the guard interval lengths, the number of carrier waves and the modulation techniques selected for the respective carrier waves of all the data transmitting symbols other than said specific data transmitting symbol in the frame from the transmitter to the receiver by means of said specific symbol.

If the average transmission power required for the i-th data transmitting symbol can be P_i in the OFDM frame of the above embodiment, P_i can be determined as a function of N_i that defines the effective symbol length in the frame so that P_i and N_i provide a one-to-one correspondence. If, additionally, there are L different possible values of N_i, there will also be L different possible values of P_i so that the average transmission power P_i may vary depending on the effective symbol length $N_i T$ of each data transmitting symbol.

With such an arrangement, different service areas may be provided for fixed reception and for mobile reception by selecting different values of the average transmission powers for fixed reception and for mobile reception.

If, in the above embodiment, the value of N_i is selected from A1, A2, ..., AL and Amax is the largest value of A1, A2, ..., AL, all the numbers Al, A2, ..., AL may be so selected as to be divisors of Amax that can exactly divide the latter. In other words, if the effective symbol length $N_i T$ is selected from A1T, A2T, ..., ALT and AmaxT is the largest value of AlT, A2T, ..., ALT, they are divisors of AmaxT that can exactly divide the latter.

Then, all the data transmitting symbols can commonly share part of the carrier waves. Therefore, data on carrier phase necessary for coherent demodulation or control data can be transmitted by means of such commonly shared carrier waves.

On the other hand, if M_i that defines the guard interval length can take only a single value, that is, if there are a plurality of values that the effective symbol length $N_i T$ can take and the guard interval length $M_i T$ can take only a single value, then the layer for fixed reception and that for mobile reception in each transmission frame will perform exactly in a same manner against inter-symbol interference due to multipath.

Finally, the frequencies of the carrier waves for the data transmitting symbols in an OFDM transmission frame may be shifted with a predetermined period and a predetermined frequency interval. More specifically, the frequencies of the carrier waves of data transmission symbols having a relatively few number of carrier waves (or symbols for mobil reception) may be shifted by the frequency interval of the carrier waves of other data transmission symbols having a relatively large number of carrier waves (or symbols for fixed reception) multiplied by an integer.

With such an arrangement, data on carrier phase necessary for coherent demodulation of symbols for fixed reception or data for equalization can be transmitted by means of the carrier waves of symbols for mobile reception.

More specifically, the frequenci s may be shifted in a radio frequency band or in a base band. FIGS. 10A and 10B are circuit configurations adapted to the former, whereas FIGS. 11A and 11B illustrates possible arrangements of carrier waves adapted to the latter. The components common to those of FIGS. 6 and 7 are respectively denoted by the same reference symbols.

(1) Frequency Shift in a Radio Frequency Band

FIG. 10A shows a circuit configuration of a transmitter designed for a frequency shift in a radio frequency band. Variable frequency local oscillator 24 shifts the oscillation frequency according to the transmission symbol by means of the frame pulse and the symbol pulse fed respectively from the frame pulse generator 20 and the symbol pulse generator 21 shown in FIG. 6. The frequency converter 19 shown in FIG. 6 can be driven by the shifted oscillation frequency to generate, for each data transmitting symbol, signals having frequencies shifted.

FIG. 10B shows a circuit configuration of a receiver designed for a frequency shift in a radio frequency band. Variable frequency local oscillator 44 shifts the oscillation frequency according to the transmission symbol by means of the frame pulse and the symbol pulse fed respectively from the frame pulse generator 38 and the symbol pulse generator 39 shown in FIG. 7. The frequency converter 32 shown in FIG. 7 can be driven to convert the OFDM signal having an intermediate or radio frequency down to a base band.

(2) Frequency Shift in a Base Band

FIG. 11A shows an arrangement of carrier wave frequencies of symbols for mobile reception. FIG. 11B shows an arrangement of carrier wave frequencies of symbols for fixed reception. In the example shown in FIGS. 11A and 11B, $m = 10$ and $n = 40$, where m is the number of carrier wave frequencies provided for the mobile-reception symbols, and n is the number of carrier wave frequencies provided for the fixed-reception symbols.

Numerals 1 to n are assigned to the carrier-wave frequencies at the input of the inverse discrete Fourier transformer provided in the transmitter. The numerals will be referred to as "frequency slot numbers." Further, numerals 1, 2, 3, ... are assigned to the symbols for data transmission. In the symbol 1 for mobile reception, data is set to the inverse discrete Fourier transformer, in every (n/m)th slot, starting with the slot 1; in the symbol 2, data is set in every (n/m)th slot, starting with the slot 2, and so forth. The inverse discrete Fourier transformer which has n points converts the data to the time domain. A signal having frequencies shifted along the time axis as shown in FIG. 11A is thereby generated.

In the symbols for fixed reception, data are set at all n points of the inverse discrete Fourier transformer, as is illustrated in FIG. 11B. The transformer performs inverse discrete Fourier transform on the data.

On the demodulation side, too, a discrete Fourier transformer having n points is used. After the discrete Fourier transform has been performed, a symbol for mobile reception is demodulated by selecting only the frequency slots which are used in the symbol.

In the embodiment described above, one or more data transmitting symbols for mobile reception which have relatively short effective length and guard interval length may be transmitted at regular time intervals within a frame, as is illustrated in FIG. 12. The embodiment can thereby realize a time interleaving effect against fading in mobile reception. This reduces burst errors and also the memory capacity required for interleaving, than in the case where symbols for mobile reception are transmitted continuously.

The above embodiment may be used for ATM telecommunications where the amount of data to be transmitted can vary as a function of time and also for transmission of data encoded in the form of variable length codes, by modifying the transmission parameters including the effective symbol length, the guard interval length, the number of carrier waves and the modulation techniques for each carrier wave by means of a specific data transmitting symbol to modify the amount of data to be transmitted on a frame basis.

The present invention is not limited to the above embodiment, which may be subjected to various changes and modifications.

Thus, the invention provides an OFDM transmission system that ensures a good reception regardless of the mode of reception and a transmitter and a receiver adapted to such a system.

Claims

1. An orthogonal frequency division multiplexing (hereinafter referred to as OFDM) transmission system for transmitting data by means of OFDM and digital modulation/demodulation, characterized in that, if the time interval of OFDM sampling points is denoted as T, the effective symbol length N_iT (N_i being a positive integer), the guard interval length M_iT (M_i being zero or a positive integer) and the number of carrier waves K_i (K_i being a positive integer) of the i-th data transmission symbol in an OFDM transmission frame, N_i, M_i and K_i can take a plurality of respective different values that can be arbitrarily selected, provided that K_i/N_iT is kept smaller than a constant value W (W being a positive real number) determined by the bandwidth of the transmission channel.

2. An orthogonal frequency division multiplexing transmission system according to claim 1, characterized in that, if the effective symbol length N_aT (N_a being a positive integer), the guard interval length M_aT (M_a being zero or a positive integer) and the number of carrier waves K_a (K_a being a positive integer) of a specific data transmitting symbol in an OFDM transmission frame are known by the receiver along with the modulation techniques selected for th

carrier waves of the specific symbol, at least part of the data on the effective symbol lengths, the guard interval lengths, the number of carrier waves and the modulation techniques selected for the respective carrier waves of all the data transmitting symbols other than said specific data transmitting symbol in the frame are transmitted from the transmitter to the receiver by means of said specific symbol.

3. An orthogonal frequency division multiplexing transmission system according to claim 1, characterized in that data transmitting symbols are transmitted in such an order that the data transmitting symbols having an identical effective symbol length and a guard interval length are continuously arranged on the time base and the number of switching points where two adjacent data transmitting symbols having at least mutually different effective symbol lengths or mutually different guard interval lengths are located is minimized.

4. An orthogonal frequency division multiplexing transmission system according to claim 1, characterized in that said OFDM transmission frame comprises data transmitting symbols having a relatively long effective symbol length and a relatively long guard interval length for fixed reception and those having a relatively short effective symbol length and a relatively short guard interval length for mobile reception.

5. An orthogonal frequency division multiplexing transmission system according to claim 4, characterized in that it is used for digital television broadcasting.

6. An orthogonal frequency division multiplexing transmission system according to claim 1, characterized in that, if the average transmission power required for the i-th data transmitting symbol is Pi in the OFDM frame of the above embodiment, Pi is determined as a function of Ni that defines the effective symbol length in the frame so that Pi and Ni provide a one-to-one correspondence and that, if there are L different values Ni can take, there are also provided L different values Pi can take.

7. An orthogonal frequency division multiplexing transmission system according to claim 1, characterized in that, if the value of Ni is selected from A1, A2, ..., AL and Amax is the largest value of A1, A2, ..., AL, all the numbers Al, A2, ..., AL are so selected as to be divisors of Amax that can exactly divide the latter.

8. An orthogonal frequency division multiplexing transmission system according to claim 1, characterized in that Mi can take a single value.

9. An orthogonal frequency division multiplexing transmission system according to claim 1, characterized in that the frequencies of the carrier waves for the data transmitting symbols in said OFDM transmission frame are shifted with a predetermined period and a predetermined frequency interval.

10. An orthogonal frequency division multiplexing transmission system according to claim 4, characterized in that at least one data transmitting symbols having a relatively short effective symbol length and a relatively short guard interval length for mobile reception are transmitted at a predetermined time interval within a frame.

11. An orthogonal frequency division multiplexing transmission system according to claim 2, characterized in that at least one of the effective symbol length, the guard interval length, the number of carrier waves and the modulation techniques is modified for each OFDM transmission frame by means of a specific data transmitting symbol on an OFDM transmission frame basis.

12. A transmitter adapted to an orthogonal frequency division multiplexing transmission system according to claim 1, characterized in that, if L FFT points are used for the modulation of data transmitting symbols in inverse discrete Fourier transform, a total of L inverse discrete Fourier transformers (121, 122, ..., 12L) are provided for each number of FFT points.

13. A receiver adapted to an orthogonal frequency division multiplexing transmission system according to claim 1, characterized in that, if L FFT points are used for the demodulation of data transmitting symbols in discrete Fourier transform, a total of L discrete Fourier transformers (421, 422, ..., 42L) are provided for each number of FFT points.
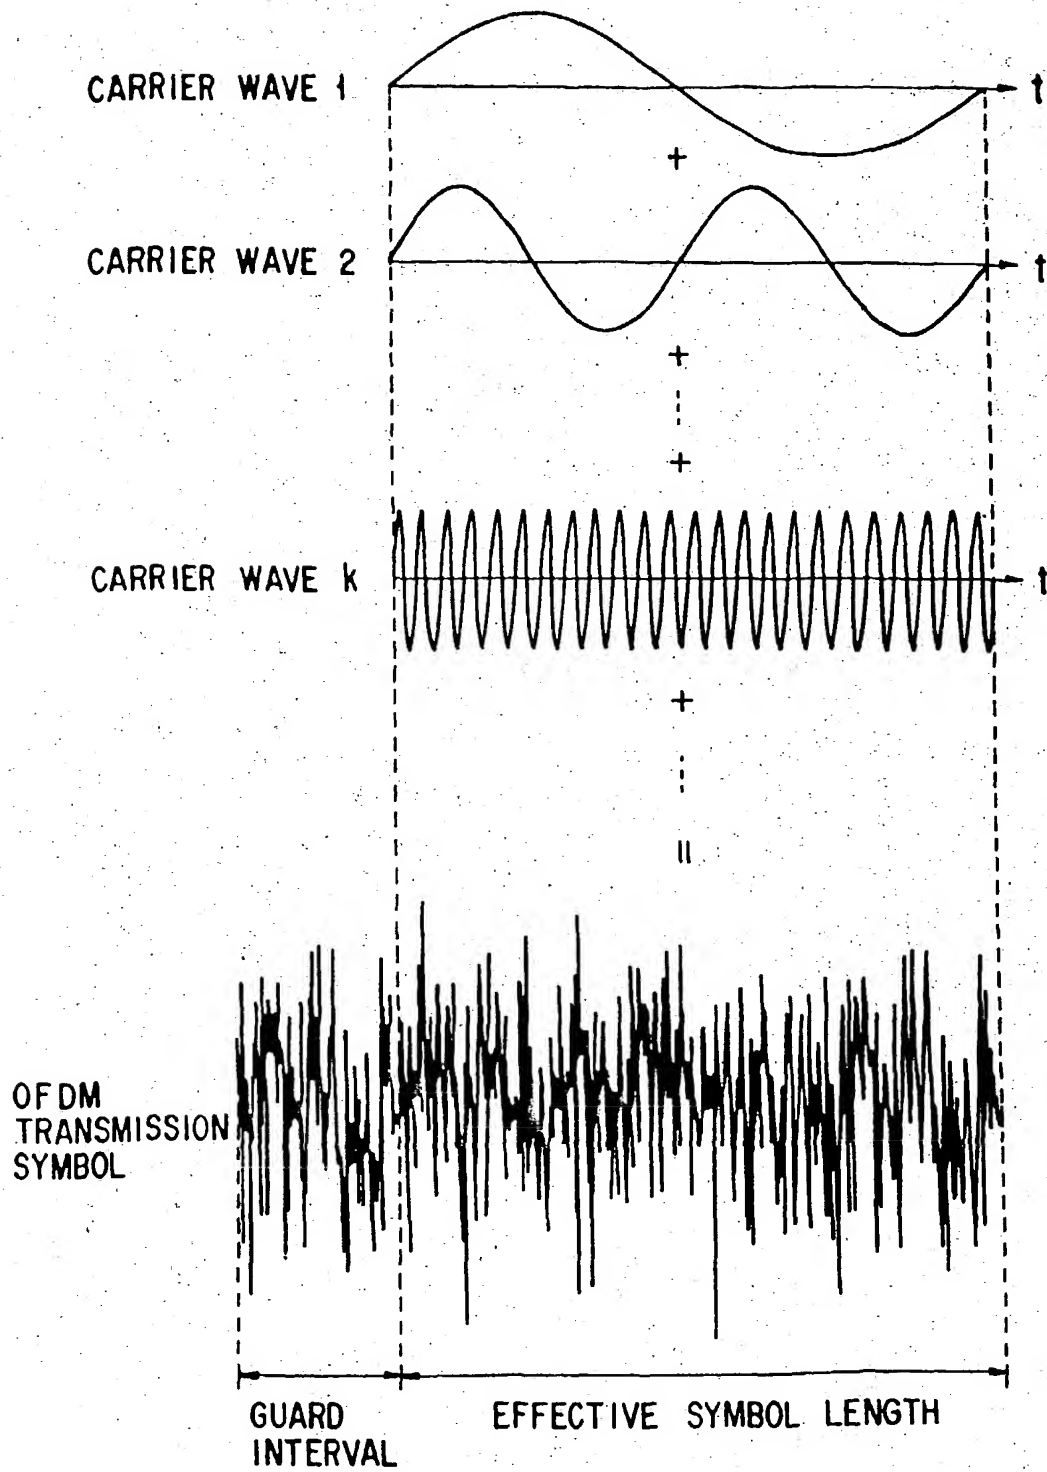
CARRIER WAVE 1

+
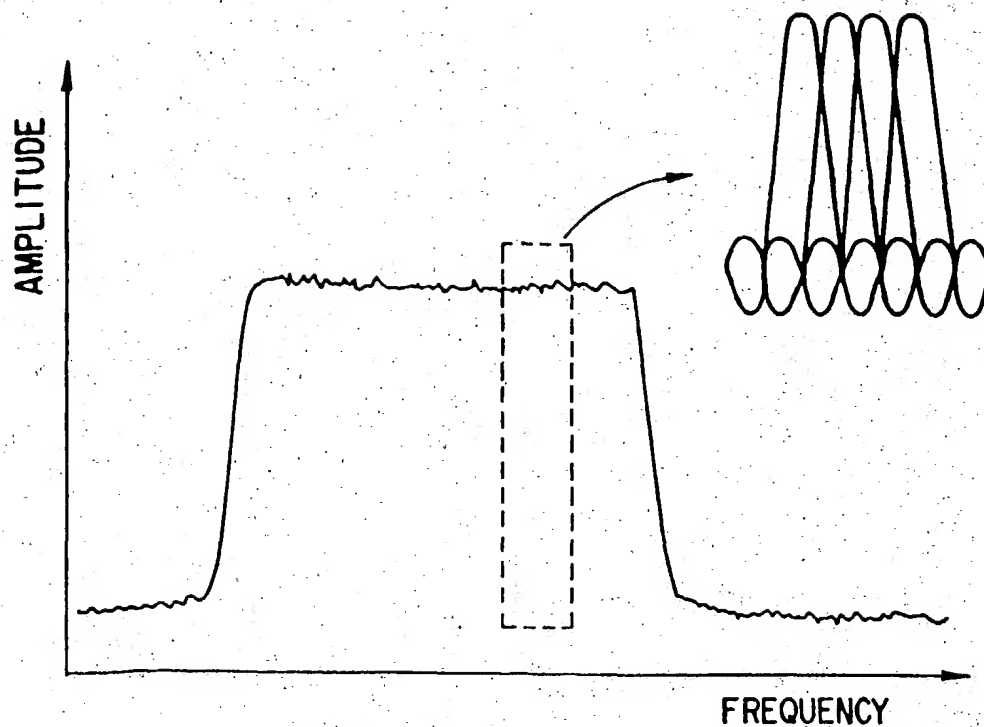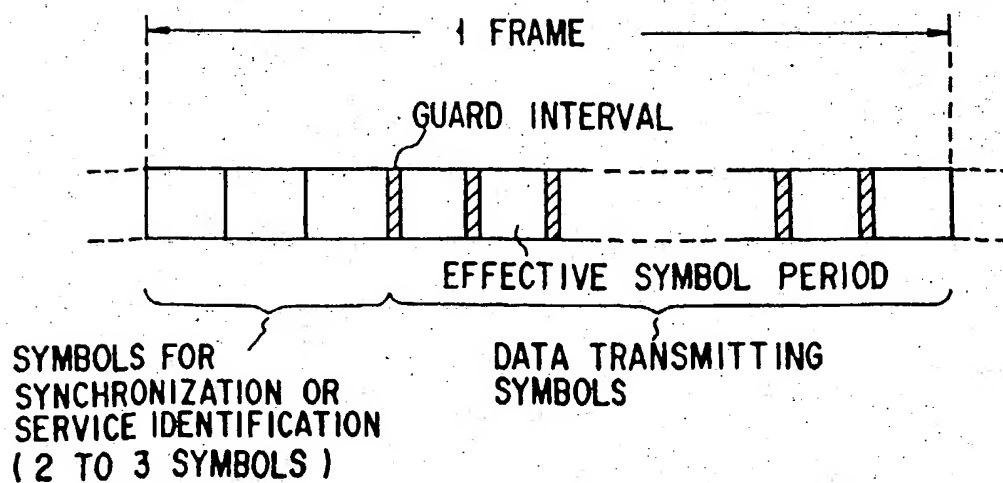
CARRIER WAVE 2

+

+

CARRIER WAVE k

+

||

OFDM
TRANSMISSION
SYMBOL

GUARD
INTERVAL

EFFECTIVE SYMBOL LENGTH

F I G. 1

F I G. 2 A

AMPLITUDE

FREQUENCY

F I G. 2 B

1 FRAME

GUARD INTERVAL

EFFECTIVE SYMBOL PERIOD

SYMBOLS FOR
SYNCHRONIZATION OR
SERVICE IDENTIFICATION
(2 TO 3 SYMBOLS)

DATA TRANSMITTING
SYMBOLS

F I G. 3

F I G. 4

GUARD BAND

AMPLITUDE

FREQUENCY BLOCK
FOR FIXED
RECEPTION

FREQUENCY

FREQUENCY BLOCK
FOR MOBILE
RECEPTION

F I G.   5

FIG. 6

SIGNAL TO BE RECEIVED → BAND PASS FILTER (31) → FREQUENCY CONVERTER (32) → A/D CONVERTER (40)

SYNCHRONIZING SYMBOL WAVEFORM MEMORY (33) → SYNCHRONIZING SYMBOL POSITION DETECTOR (34) → 38,39

OSCILLATION FREQUENCY CONTROL SIGNAL GENERATOR (35) → LOCAL OSCILLATOR (36) → SAMPLING CLOCK GENERATOR (37)

FRAME PULSE GENERATOR (38)

SYMBOL PULSE GENERATOR (39)

A/D CONVERTER (40) → SERIAL/PARALLEL CONVERTER (411) → DISCRETE FOURIER TRANSFORMER (421) → DEMODULATION-PARALLEL/SERIAL CONVERTER (431) → SEQUENCE OF DATA TO BE RECEIVED D1

SERIAL/PARALLEL CONVERTER (412) → DISCRETE FOURIER TRANSFORMER (422) → DEMODULATION-PARALLEL/SERIAL CONVERTER (432) → SEQUENCE OF DATA TO BE RECEIVED D2

SERIAL/PARALLEL CONVERTER (41L) → DISCRETE FOURIER TRANSFORMER (42L) → DEMODULATION-PARALLEL/SERIAL CONVERTER (43L) → SEQUENCE OF DATA TO BE RECEIVED DL
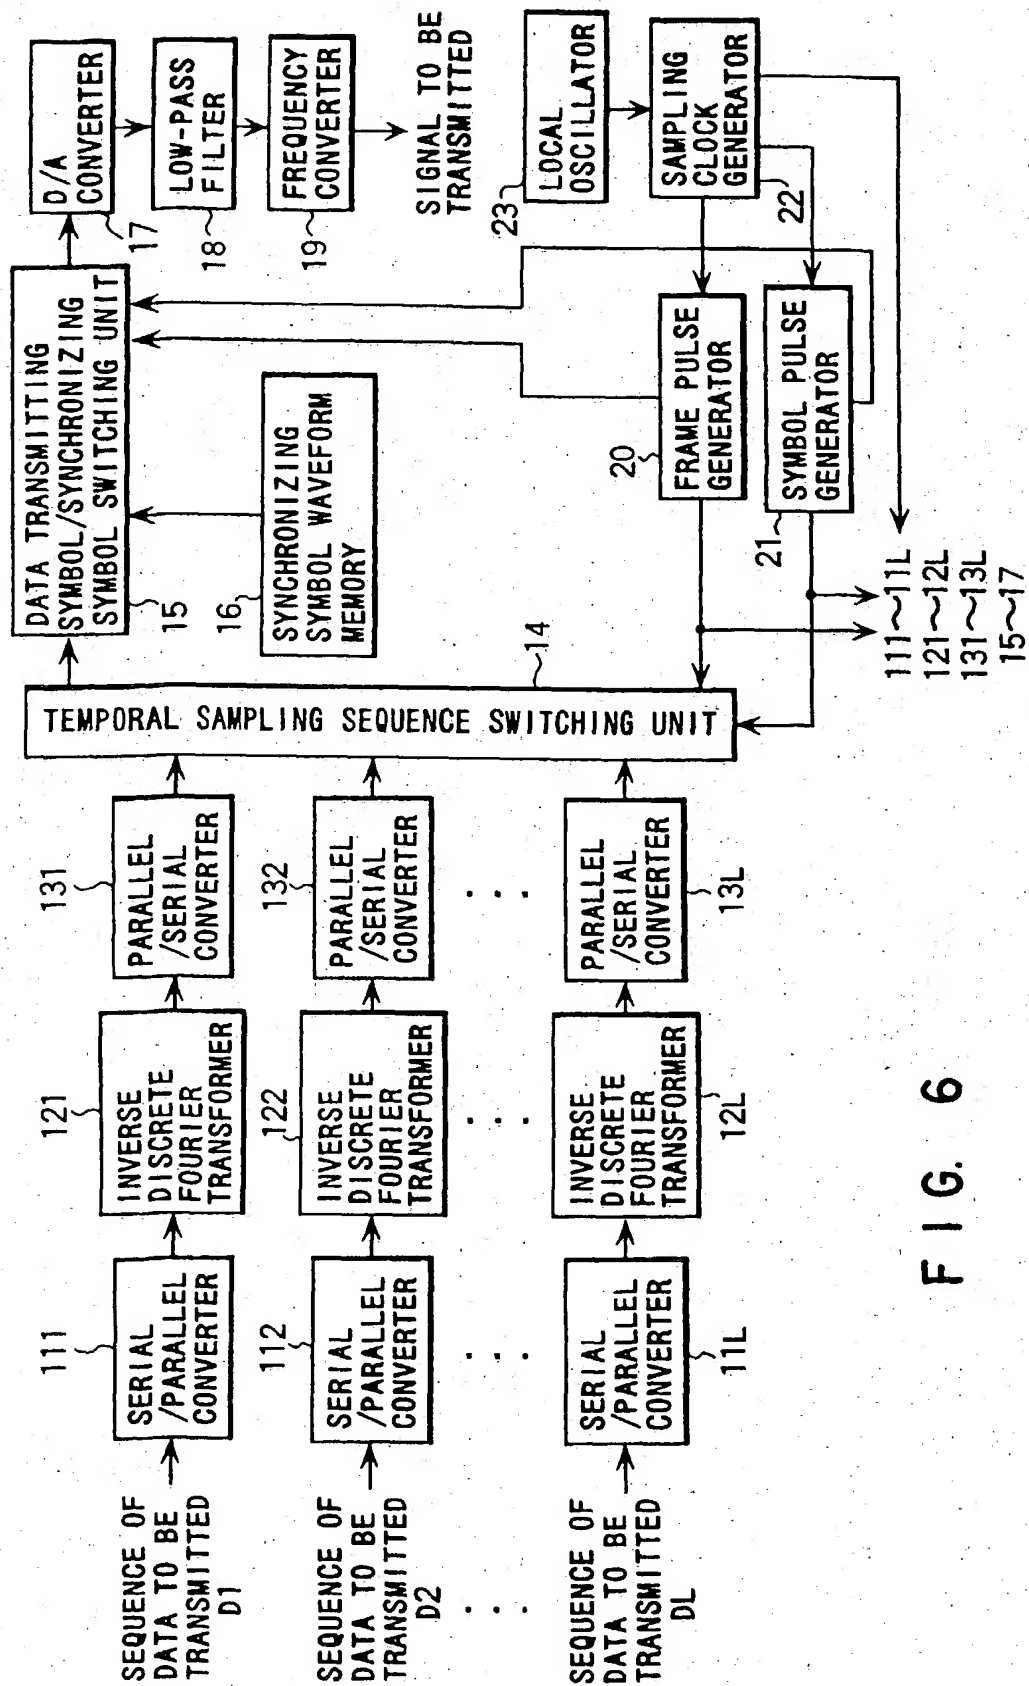
411∼41L
421∼42L
431∼43L

F I G. 7

14

FIG. 8

FIG. 9

FIG. 12

19

```
              ┌─────────────────────┐
        ────▶ │    FREQUENCY        │ ──▶ SIGNAL TO BE
              │    CONVERTER        │     TRANSMITTED
              └─────────────────────┘
                        ▲
              ┌─────────────────────┐
              │ FREQUENCY VARIABLE  │
              │ LOCAL OSCILLATOR    │
              └─────────────────────┘
                24    ▲        ▲
                      │    ┌──────────────────┐
                      │    │ FRAME PULSE      │──20
                      │    │ GENERATOR        │
                      │    └──────────────────┘
                      │    ┌──────────────────┐
                      │    │ SYMBOL PULSE     │──21
                      └────│ GENERATOR        │
                           └──────────────────┘
```

F I G. 10A

32

```
              ┌─────────────────────┐
        ────▶ │    FREQUENCY        │ ──▶ A/D CONVERTER
              │    CONVERTER        │
              └─────────────────────┘
                        ▲
              ┌─────────────────────┐
              │ FREQUENCY  VARIABLE │
              │ LOCAL OSCILLATOR    │
              └─────────────────────┘
                44    ▲        ▲
                      │    ┌──────────────────┐
                      │    │ FRAME PULSE      │──38
                      │    │ GENERATOR        │
                      │    └──────────────────┘
                      │    ┌──────────────────┐
                      │    │ SYMBOL PULSE     │──39
                      └────│ GENERATOR        │
                           └──────────────────┘
```

F I G. 10B

SERIAL/PARALLEL CONVERTER (n)

CARRIER WAVE FREQUENCIES FOR TRANSMISSION

TIME

F I G. 11A

SERIAL/PARALLEL CONVERTER (n)

TIME

F I G. 11B

(54) **MCM system, with a plurality of data streams, each with its own transmission parameters**

(57) Data sequences (D1 through DL) correspond to L different parameter sets (effective symbol length, guard interval length, the number of carrier waves) and transformed into parallel data by respective serial/parallel converters (111 through 11L), which are allocated to respective carrier waves for OFDM and subjected to inverse discrete Fourier transform by inverse discrete Fourier transformers (121 through 12L) to produce sampled values for the transmission waveform in the time domain. The sampled values are transformed into serial sequences of sampled values by parallel/serial converters (131 through 13L) and then into a single temporal sampling sequence by a temporal sampling sequence switching unit (14). A frame synchronizing symbol is added to the temporal sampling sequence and then transformed into an analog base band OFDM signal before it is converted up to a transmission signal. The frequency bandwidth of the OFDM signal is made smaller than a predetermined value defined by the bandwidth of the available transmission channel. As a result, an OFDM signal that can be received well regardless of the mode of reception can be transmitted.
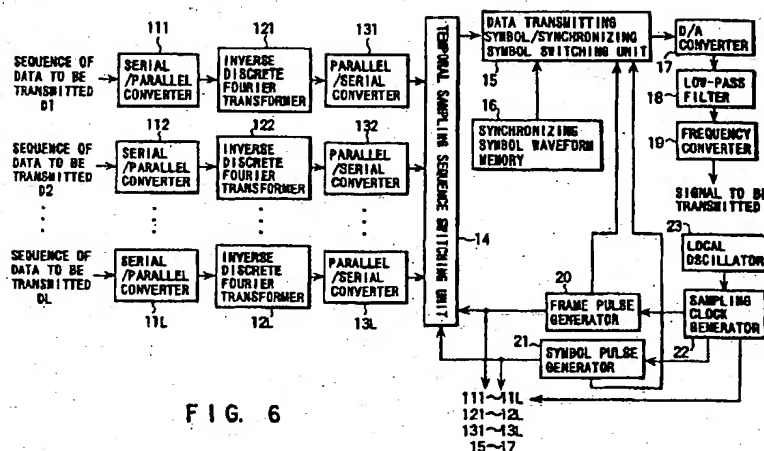
FIG. 6

EP 0 762 701 A3

| | European Patent Office | EUROPEAN SEARCH REPORT | | Application Number EP 96 11 4145 |

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	DE 44 25 713 C (INST RUNDFUNKTECHNIK GMBH) 20 April 1995 (1995-04-20) * abstract * * column 1, line 36 - column 2, line 13 * * column 2, line 46 - line 68 * * claims 1-4 * * figures 1-4 *	1-3,9,11	H04L27/26
X	EP 0 589 709 A (MATSUSHITA ELECTRIC IND CO LTD) 30 March 1994 (1994-03-30) * abstract * * page 45, line 9 - page 46, line 13 * * figures 145-147,149 *	1-5,8-10	
A	DE 44 03 408 C (GRUNDIG EMV) 23 February 1995 (1995-02-23) * abstract * * figures 1-3 * * claims 1-3 *	1-13	
P,X	GB 2 291 314 A (BRITISH BROADCASTING CORP) 17 January 1996 (1996-01-17) * page 5, line 32 - page 6, line 26 * * figure 3 *	1,3-5, 8-10,12, 13	TECHNICAL FIELDS SEARCHED (Int.Cl.6) H04L

The present search report has been drawn up for all claims

Place of search	Date of completion of the search	Examiner
THE HAGUE	23 March 2000	Langinieux, F

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 96 11 4145

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-03-2000

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
DE 4425713	C	20-04-1995	AT	170685 T	15-09-1998
			AU	681806 B	04-09-1997
			AU	3162795 A	16-02-1996
			CZ	9603697 A	16-04-1997
			DE	59503453 D	08-10-1998
			WO	9602989 A	01-02-1996
			EP	0771497 A	07-05-1997
			ES	2121410 T	16-11-1998
			FI	970204 A	17-01-1997
			HU	77417 A,B	28-04-1998
			JP	2901018 B	02-06-1999
			JP	9512156 T	02-12-1997
			PL	318348 A	09-06-1997
EP 0589709	A	30-03-1994	AU	660123 B	08-06-1995
			AU	5905294 A	20-10-1994
			CA	2106919 A	26-03-1994
			CA	2119983 A	26-09-1994
			CN	1099544 A	01-03-1995
			EP	0617531 A	28-09-1994
			JP	7322219 A	08-12-1995
			JP	7099522 A	11-04-1995
			KR	161051 B	15-01-1999
			US	5892879 A	06-04-1999
			US	5802241 A	01-09-1998
			US	5600672 A	04-02-1997
			AU	3552093 A	30-09-1993
			CA	2092495 A	27-09-1993
			CA	2226489 A	27-09-1993
			CN	1076816 A,B	29-09-1993
			EP	0562875 A	29-09-1993
			JP	6164665 A	10-06-1994
			KR	9602468 B	17-02-1996
			US	5819000 A	06-10-1998
			US	5999569 A	07-12-1999
DE 4403408	C	23-02-1995	EP	0666661 A	09-08-1995
GB 2291314	A	17-01-1996	WO	9601535 A	18-01-1996